

03/2022



**⚠** Above stated body materials refer to the valve port connections that get in contact with the media only!

**details needed for main valve**

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- type of actuation

**details needed for pneumatic actuation**

- nominal voltage
- type of protection
- actuation pressure range min/max
- pilot valve type

**details needed for hydraulic actuation**

- actuation pressure range min/max
- hydraulic control valve function

**⚠** The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

**⚠** If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application. To avoid hydraulic shocks in pipelines, the flow velocities must be taken into account when designing valves for liquids.

■ specifications not highlighted are standard  
■ specifications highlighted in grey are optional

**2/2-way valve**

- pressure range
- orifice
- connection
- function

**operating principle**

**body material**

**valve seat**

**seal materials**

**ports**

- function
- pressure range

- Kv value
- vacuum
- pressure-vacuum

- back pressure
- media

- abrasive media
- damping

- flow direction
- switching cycles
- switching time

- media temperature
- ambient temperature
- flush ports
- leak ports
- limit switches
- manual override
- approvals
- mounting
- weight
- additional equipment

**nominal voltage**

**power consumption**

- protection
- energized duty rating
- connection
- optional additional equipment
- max. temperature

**explosion proof**


- actuation pressure range
- air consumption
- cycle speed
- control
- pilot valve interface
- actuator ports

- actuation pressure range
- control
- actuator ports
- by media


**externally controlled**

- PN 0-100 bar
- DN 50 mm
- thread/flange

- valve normally closed
- symbol **NC**



- valve normally open
- symbol **NO**



**pressure balanced, with spring return**

- ①
- ② steel galvanized
- ③
- ④ steel, nickel plated
- ⑤ without non-ferr. Metals
- ⑥ stainless steel

**synthetic materials on metal**

- NBR
- PTFE, FPM, CR, EPDM

**general specifications**

- VMK threads G 2
- VFK flanges PN 63 / 100
- NC
- 0-63 / 0-100

**options**

- special threads
- special flanges
- NO
- > 100 bar upon request

- m<sup>3</sup>/h 43,0
- leak rate < 10<sup>-6</sup> mbar•L•s<sup>-1</sup>
- P<sub>1</sub> ⇔ P<sub>2</sub> pressure side max. 100 bar
- P<sub>2</sub> > P<sub>1</sub> vacuum side leak rate upon request available (max. 16 bar)
- gaseous - liquid - highly viscous - gelatinous - pasty - contaminated

- opening by throttles on pilot valve
- closing as marked
- A ⇔ B bi-directional upon request

- 1/min 100
- ms opening 150-3000
- closing 150-3000
- °C direct mounted pilot valve 60
- °C direct mounted pilot valve 50

- remote mounted pilot valve outside temperatur range of media max. 160 °C
- available
- available
- inductive / mechanical upon request

- via pilot valve
- LR/DNV/WAZ
- mounting brackets
- kg VMK 12,3 VFK 18,7
- upon request

**electrical specifications**

- U<sub>n</sub> DC 24 V
- U<sub>n</sub> AC 230 V 50 Hz
- DC 4,8 W
- AC pick up 11,0 VA holding 8,5 VA
- IP65 (P54) acc. DIN 40050
- ED 100%

**options**

- special voltage upon request
- special voltage upon request
- 2,5 W [actuation pressure range 4-7 bar]

- plug acc. DIN EN 175301-803 form B, 4 positions x90° / wire diameter 6-8 mm
- M12x1 connector acc. DESINA
- connector acc. VDMA

- illuminated plug with varistor
- media 60°C
- ambient 50°C
- E Ex e II T5 nominal voltage U<sub>n</sub> DC 24 V 3,25 W
- power consumption AC 230 V 50 Hz 2,90 W

**pneumatic specifications**

- bar 4-10
- cm<sup>3</sup>/stroke 65
- main valve speed variable by throttleson pilot valve preferably 5/2 way pilot valve
- co-ax / Namur ISO 1
- 2/4 G 1/8 G 1/4

**options**

**hydraulic specifications**



- bar 15-30 / 30-60
- preferably 4/2 way control valve
- X/Y G 1/4 NPT 1/4

**options**

# coax® data sheet - coaxial valve

type VMK 50  
VFK 50



function: **NC**  
closed when not energized

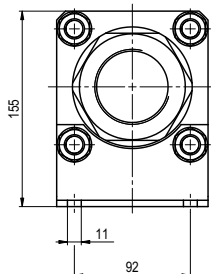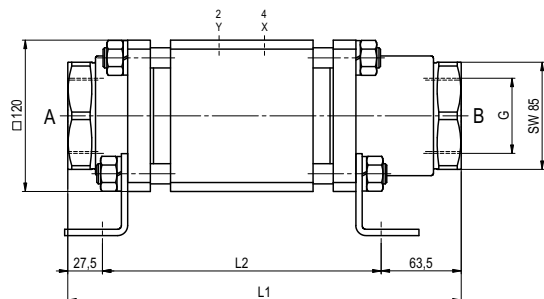

constructive length	L1	L2	L3
standard	312	221	385
with inductive limit switches	312	221	385
with force-feed lubrication nipple	312	221	385
with mechanical limit switches	-	-	-

flanges PN	DIN	ØD	Øk	Ød
63	EN 1092-1	180	135	22
100	EN 1092-1	195	145	26

function: **NO**  
open when not energized

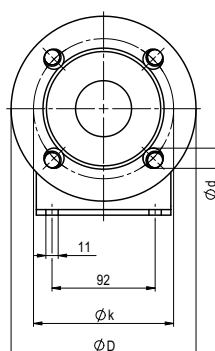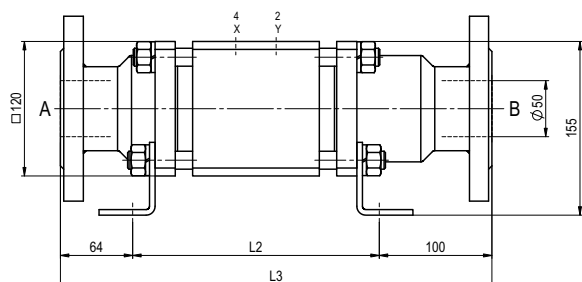

### pneumatic specifications

